

## POLE MOUNT FLUORESCENT FIXTURE INSTALLATION INSTRUCTIONS

*Please read carefully and save these instructions, as you may need them at a later date.*

### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### ASSEMBLY AND INSTALLATION

1. Pull the power supply wires out from the POLE (1). Attach the BLACK SUPPLY WIRE (3) to the BLACK FIXTURE WIRE (6) and the WHITE SUPPLY WIRE (2) to the WHITE FIXTURE WIRE (5) using WIRE NUTS (8) (provided). Connect the FIXTURE GROUND WIRE (7) to the POWER SUPPLY GROUND WIRE (4) using a WIRE NUT (8) (not included). Tuck wires into the POLE (1).
2. Place YOKE (9) onto the POLE (1) and secure with SCREW (16).
3. Install LISTED COMPACT FLUORESCENT LAMP (17) of correct wattage (see fixture label) by inserting and then twisting until locked into the SOCKET (18).
4. Place COVER (11) over NIPPLE (15) above the HOUSING (10) and secure with WASHER (14) and NUT (13). Add FINIAL (12) last.
5. Restore power at circuit breaker.
6. The PHOTOCONTROL (not shown) in this fixture is designed to turn on fix-ture light at low light levels.during daylight installation light should come on for 1-4min.and then go off.

**INSTALLATION IS NOW COMPLETED**

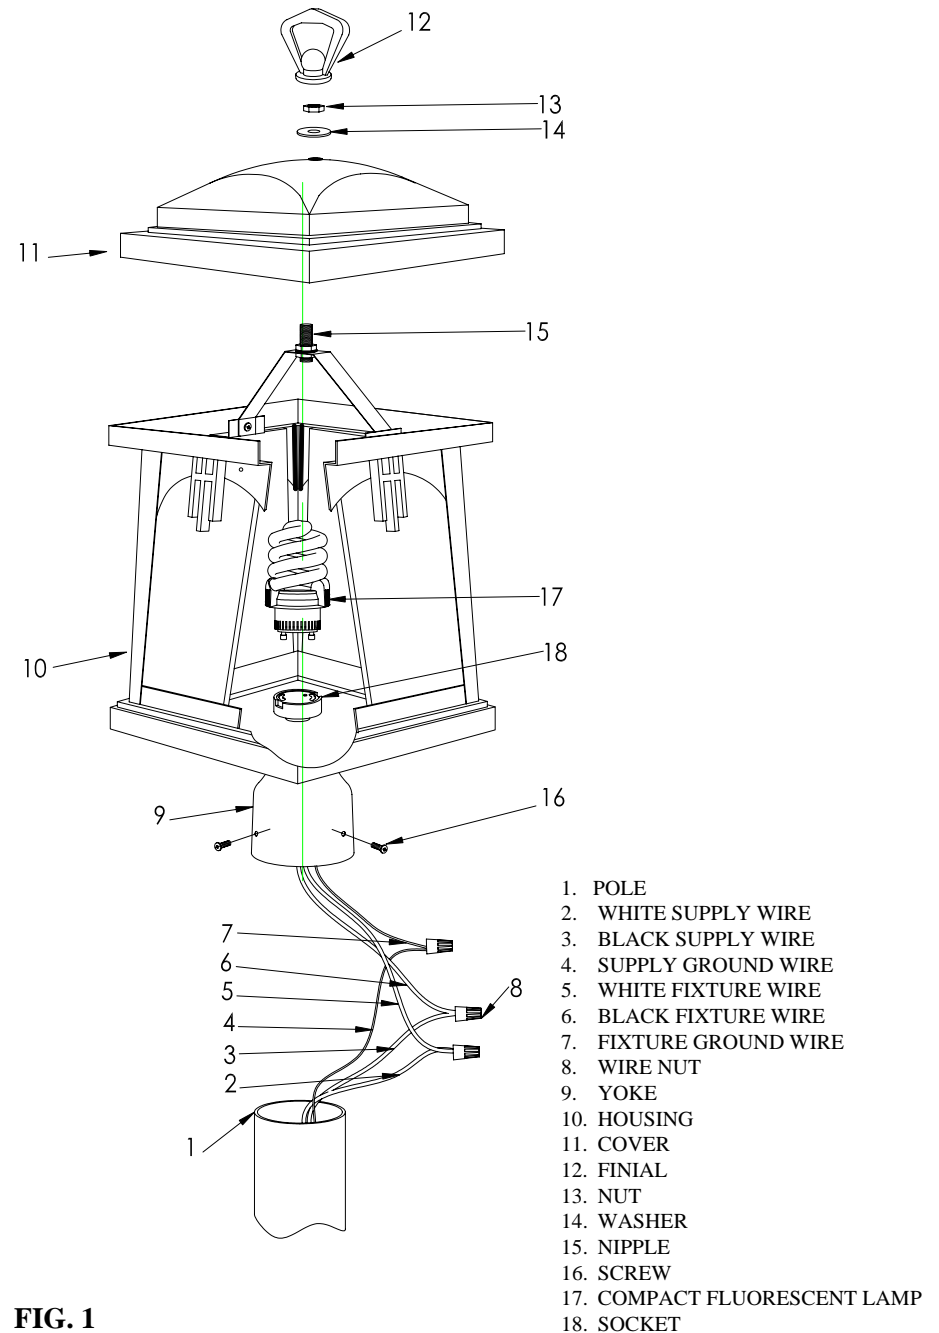

**FIG. 1**